




AIR PURIFIER SELECTION GUIDE

DUCT MOUNT MODELS

WHICH AIR PURIFIER IS THE BEST CHOICE FOR YOUR HOME?



DISCLAIMER: THE HEALTH ASPECTS ASSOCIATED WITH THE USE OF THIS PRODUCT AND ITS ABILITY TO AID IN DISINFECTION OF ENVIRONMENTAL AIR HAVE NOT BEEN INVESTIGATED BY ETL.

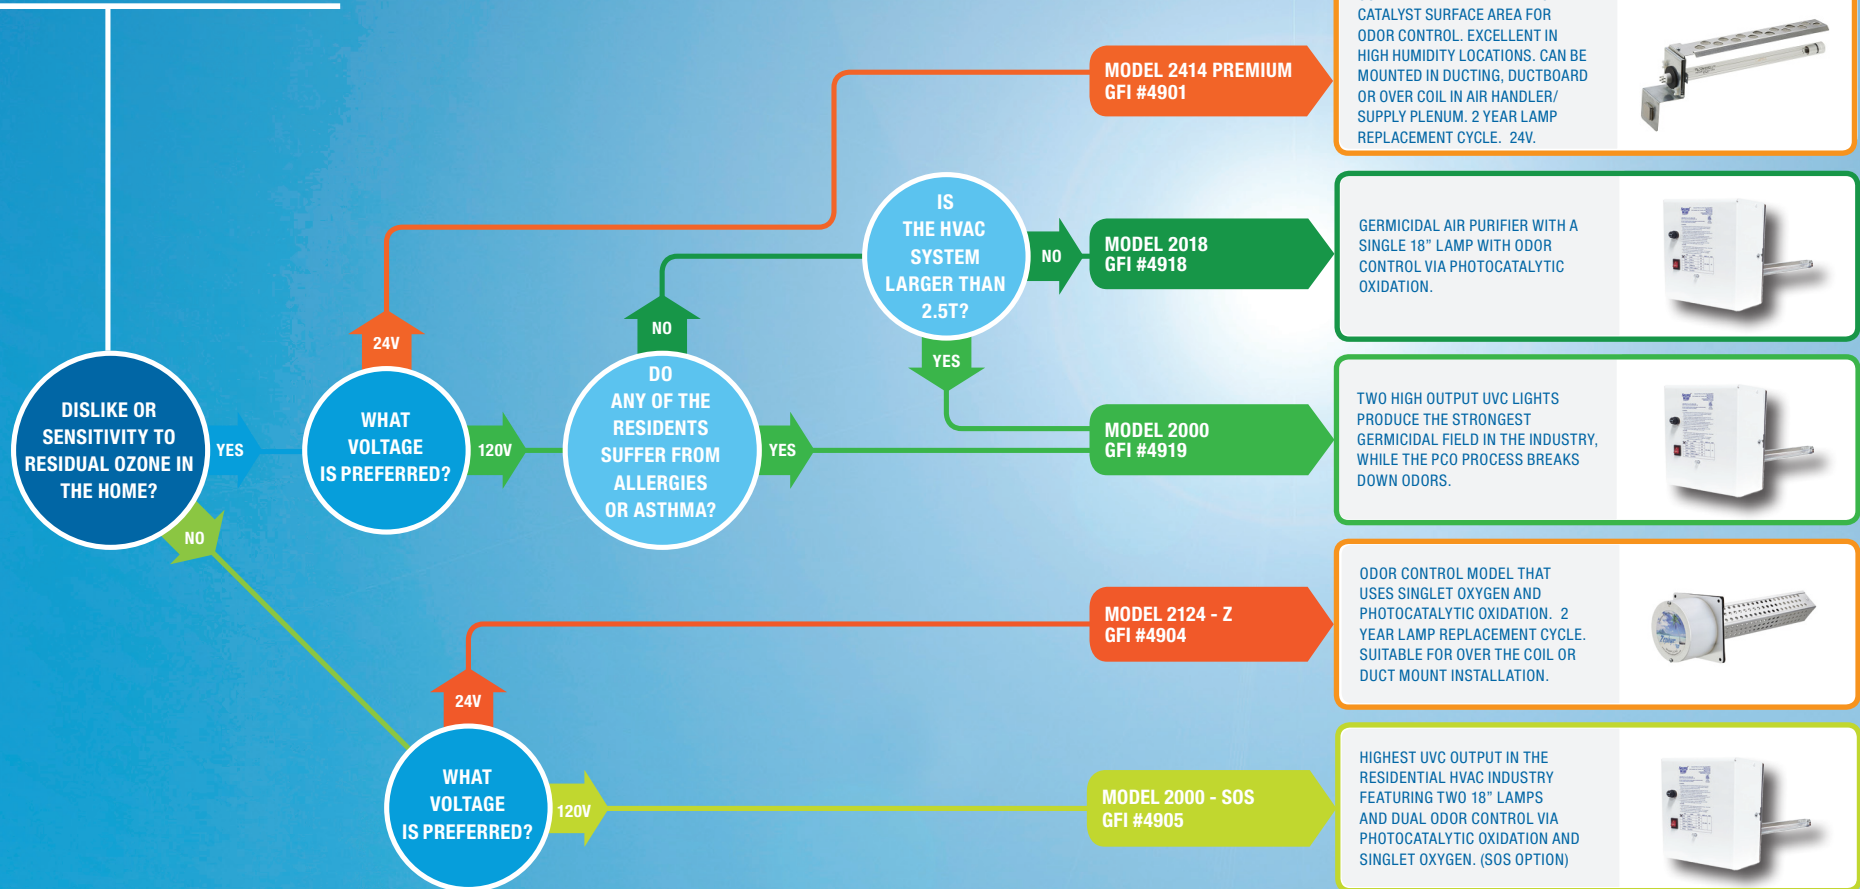

THIS GUIDE IS FOR REFERENCE ONLY – INSTALLERS OR HOMEOWNERS MAY USE ANY DEVICE THEY SELECT.

* SINGLET OXYGEN CAN PRODUCE RESIDUAL OZONE THAT CAN CAUSE RESPIRATORY IRRITATION AND SHOULD NOT BE USED IN THE PRESENCE OF INFANTS OR SENIORS. DEVICES THAT PRODUCE RESIDUAL OZONE DO NOT EXCEED OSHA SAFETY LIMITS (.05 PPM) UNDER PROPER OPERATING CONDITIONS – USE AT YOUR OWN RISK.

Updated 2-2020



GENERAL FILTERS
INC.

43800 Grand River Ave Novi, MI 48375 Phone: (866) 476-5101

Submit Your PO to:

Fax: (248) 349-2366

Email: customerservice@generalfilters.com


secondwindairpurifier.com




AIR PURIFIER SELECTION GUIDE

COIL CLEAN MODELS (24V)

WHICH AIR PURIFIER IS THE BEST CHOICE FOR YOUR HOME?

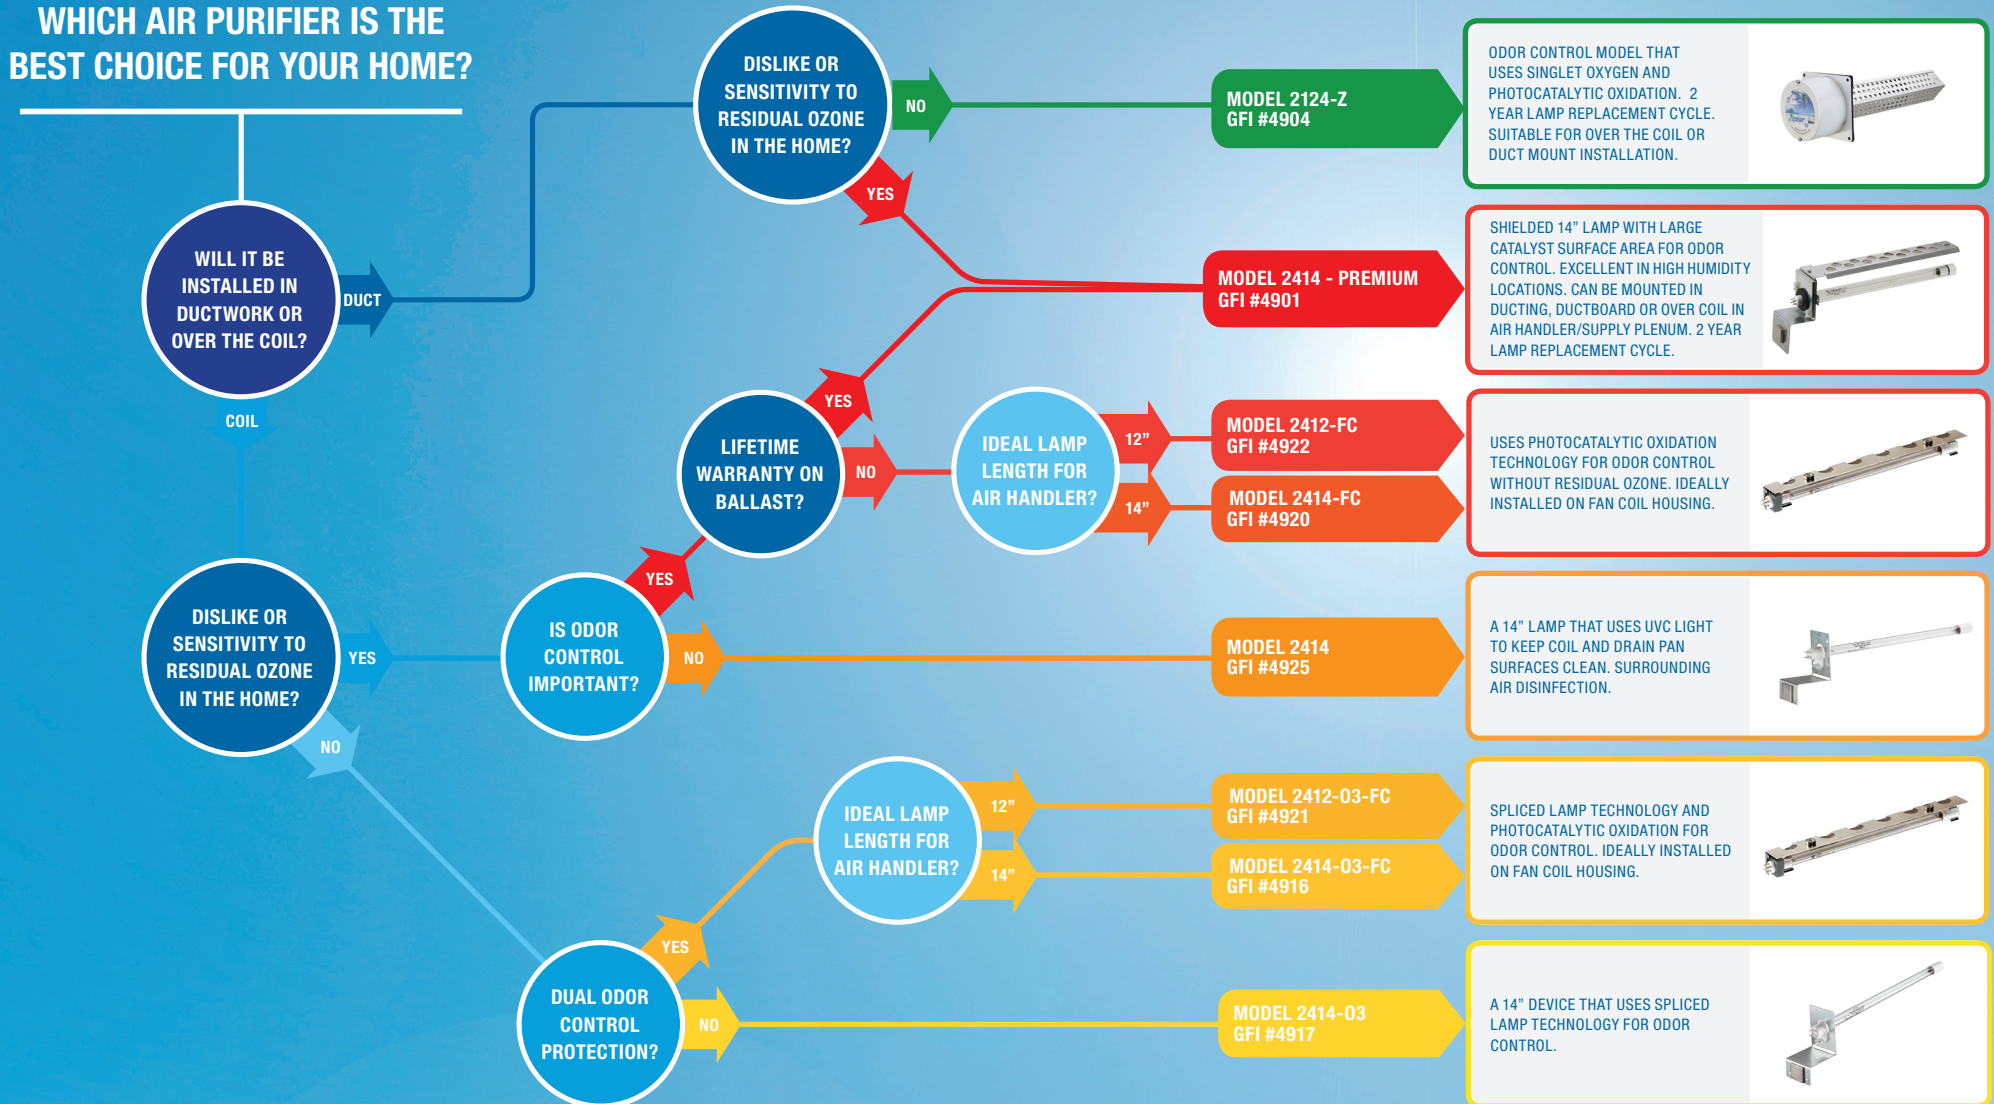

ODOR CONTROL MODEL THAT USES SINGLET OXYGEN AND PHOTOCATALYTIC OXIDATION. 2 YEAR LAMP REPLACEMENT CYCLE. SUITABLE FOR OVER THE COIL OR DUCT MOUNT INSTALLATION.




SHIELDED 14" LAMP WITH LARGE CATALYST SURFACE AREA FOR ODOR CONTROL. EXCELLENT IN HIGH HUMIDITY LOCATIONS. CAN BE MOUNTED IN DUCTING, DUCTBOARD OR OVER COIL IN AIR HANDLER/SUPPLY PLENUM. 2 YEAR LAMP REPLACEMENT CYCLE.



USES PHOTOCATALYTIC OXIDATION TECHNOLOGY FOR ODOR CONTROL WITHOUT RESIDUAL OZONE. IDEALLY INSTALLED ON FAN COIL HOUSING.



A 14" LAMP THAT USES UVC LIGHT TO KEEP COIL AND DRAIN PAN SURFACES CLEAN. SURROUNDING AIR DISINFECTION.



SPLICED LAMP TECHNOLOGY AND PHOTOCATALYTIC OXIDATION FOR ODOR CONTROL. IDEALLY INSTALLED ON FAN COIL HOUSING.



A 14" DEVICE THAT USES SPLICED LAMP TECHNOLOGY FOR ODOR CONTROL.



THIS GUIDE IS FOR REFERENCE ONLY – INSTALLERS OR HOMEOWNERS MAY USE ANY DEVICE THEY SELECT.

* SINGLET OXYGEN CAN PRODUCE RESIDUAL OZONE THAT CAN CAUSE RESPIRATORY IRRITATION AND SHOULD NOT BE USED IN THE PRESENCE OF INFANTS OR SENIORS. DEVICES THAT PRODUCE RESIDUAL OZONE DO NOT EXCEED OSHA SAFETY LIMITS (.05 PPM) UNDER PROPER OPERATING CONDITIONS – USE AT YOUR OWN RISK.



GENERAL FILTERS INC.

43800 Grand River Ave Novi, MI 48375 Phone: (866) 476-5101

Submit Your PO to:

Fax: (248) 349-2366

Email: customerservice@generalfilters.com

secondwindairpurifier.com